




# 1 PORT RS232/485/422 DIN-RAIL ETHERNET SERIAL DEVICE SERVER

## DDSE SERIES



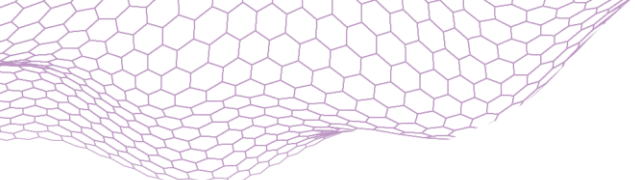

## SYNOPSIS

---

- EQUIPPED WITH 1 × RS232/RS485/422 SERIAL INTERFACE AND 1 × 10/100 MBPS ETHERNET PORT
- SUPPORTS MULTIPLE COMMUNICATION PROTOCOLS INCLUDING UDP, TCP, MODBUS, HTTP, WEBSOCKET, MQTT (UNDER DEVELOPMENT), AND VIRTUAL SERIAL PORT
- ENABLES SEAMLESS PROTOCOL CONVERSION BETWEEN MODBUS RTU/ASCII AND MODBUS TCP
- SUPPORTS TRANSPARENT TRANSMISSION OF MODBUS RTU/ASCII OVER TCP
- INDUSTRIAL-GRADE DESIGN WITH WIDE-RANGE DC 9–36V POWER INPUT AND REVERSE POLARITY PROTECTION
- OPERATES RELIABLY ACROSS AN EXTENDED TEMPERATURE RANGE OF -40°C TO +85°C
- PROVIDES ROBUST PROTECTION WITH HIGH-LEVEL ESD, SURGE, AND EFT IMMUNITY FOR POWER, ETHERNET, AND SERIAL INTERFACES

## FEATURES

---

- EQUIPPED WITH A HIGH-PERFORMANCE 32-BIT ARM CORTEX-M7 PROCESSOR OPERATING AT UP TO 400 MHZ
- SUPPORTS SERIAL COMMUNICATION WITH BAUD RATES RANGING FROM 600 BPS TO 460 KBPS
- SUPPORTS UDP AND UDP MULTICAST MODES FOR EFFICIENT POINT-TO-POINT, POINT-TO-MULTIPOINT, AND MULTIPOINT-TO-MULTIPOINT COMMUNICATION
- SUPPORTS TCP CLIENT AND SERVER MODES FOR RELIABLE SESSION-BASED COMMUNICATION; TCP CLIENT SUPPORTS UP TO 4 SIMULTANEOUS SESSIONS, WHILE TCP SERVER SUPPORTS UP TO 8 SESSIONS, WITH RFC2217 SUPPORT FOR REMOTE SERIAL PARAMETER CONFIGURATION
- SUPPORTS PAIR CONNECTION MASTER/SLAVE MODE, ENABLING SIMPLE DEVICE PAIRING FOR DATA TRANSMISSION
- SUPPORTS MODBUS RTU/ASCII MASTER AND SLAVE MODES, ALLOWING SEAMLESS CONVERSION BETWEEN MODBUS TCP AND MODBUS RTU/ASCII PROTOCOLS
- SUPPORTS MODBUS SLAVE PRE-READING WITH AUTOMATIC LEARNING OF UP TO 32 RTU OR 16 ASCII COMMANDS FOR FASTER RESPONSE TIMES
- SUPPORTS REALCOM MODE FOR VIRTUAL COM PORT MAPPING OVER ETHERNET, ENSURING TRANSPARENT COMMUNICATION
- SUPPORTS HTTP CLIENT MODE WITH GET AND POST METHODS FOR DATA INTERACTION WITH HTTP SERVERS
- SUPPORTS WEBSOCKET CLIENT MODE FOR FULL-DUPLEX COMMUNICATION WITH WEBSOCKET SERVERS
- PROVIDES FLEXIBLE DATA PACKETIZATION MECHANISMS BASED ON DATA LENGTH OR TIME INTERVALS, ENSURING REAL-TIME DATA TRANSMISSION ACROSS NETWORKS
- SUPPORTS REGISTRATION AND HEARTBEAT PACKET MECHANISMS FOR CONNECTION VALIDATION AND REAL-TIME STATUS MONITORING
- SUPPORTS MODBUS VIRTUAL ID FUNCTIONALITY, ENABLING MAPPING OF PHYSICAL SLAVE IDS TO VIRTUAL IDS TO PREVENT ADDRESS CONFLICTS AND ENSURE RELIABLE COMMUNICATION
- SUPPORTS CONFIGURABLE SERIAL COMMUNICATION PARAMETERS, OPERATING MODES, AND PROVIDES TRANSMISSION AND RECEPTION FRAME STATISTICS FOR PERFORMANCE MONITORING AND DIAGNOSTICS

## TECHNICAL SPECIFICATIONS

### INTERFACE

|                         |                                                                                                                                                                                                                                                       |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>100M Copper Port</b> | 1x10/100Base-T(X) auto-sensing RJ45ports, support full/half duplex, Auto MDI/MDI-X                                                                                                                                                                    |
| <b>Serial Port</b>      | Serial port type : 1 * RS232/485/422<br>Baud rate : 600bps to 460800bps<br>Data bits : 7bit, 8bit<br>Stop bit : 1 bit, 2 bit<br>Check bits : None, Odd, Even<br>Connection method : 5.08mm pitch 5-pin terminal block for RS485 / 422, DB9M for RS232 |
| <b>Button</b>           | One-click restart, or factory reset                                                                                                                                                                                                                   |
| <b>Status LED</b>       | PWR, RUN, Tx, RX, Ethernet speed and LINK/ACT.                                                                                                                                                                                                        |

### SOFTWARE

|                                        |                                                                                                                      |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| <b>Network Protocol</b>                | IP, TCP/UDP, ARP, ICMP, DHCP, DNS, HTTP, RFC2217                                                                     |
| <b>IP Obtaining Method</b>             | Static IP/DHCP                                                                                                       |
| <b>Domain Name Resolution</b>          | Support                                                                                                              |
| <b>User Configuration</b>              | Web configuration                                                                                                    |
| <b>Simple Transparent Transmission</b> | UDP/ UDP Multicast/ TCP Client/ TCP Server/ RealCOM/ Pair Connection                                                 |
| <b>Modbus</b>                          | Modbus RTU/ASCII to Modbus TCP                                                                                       |
| <b>Serial Packaging Mechanism</b>      | The time and length can be set. The default value varies based on the baud rate. Maximum packaging length 1460 bytes |
| <b>TCP Server Connection</b>           | Single serial port supports up to 8 TCP client connections                                                           |
| <b>Network Cache</b>                   | Send: 16Kbyte; Received: 16Kbyte                                                                                     |
| <b>Serial Cache</b>                    | Send: 1.5Kbyte; Received: 1.5Kbyte                                                                                   |
| <b>Heartbeat Package</b>               | Support TCP Keepalive mechanism and customize heartbeat packet content                                               |
| <b>Registration Package</b>            | Custom registration package content                                                                                  |
| <b>RFC2217</b>                         | Supported                                                                                                            |
| <b>HTTPD Client</b>                    | Supported                                                                                                            |
| <b>Websocket Client</b>                | Supported                                                                                                            |
| <b>RealCOM</b>                         | Support                                                                                                              |
| <b>Average Transmission Delay</b>      | <10ms                                                                                                                |

## POWER

|                          |                                                                 |
|--------------------------|-----------------------------------------------------------------|
| <b>Input Voltage</b>     | DC 9 to 36V                                                     |
| <b>Power Consumption</b> | < 0.5W@DC12V                                                    |
| <b>Connection</b>        | 5.08mm pitch 2-pin terminal block or $\Phi$ 2.5mm DC round head |

## MECHANICAL


|                      |                                         |
|----------------------|-----------------------------------------|
| <b>Dimensions</b>    | 96×90×26mm (mounting brackets included) |
| <b>Installations</b> | Wall Mount                              |
| <b>Housing</b>       | Metal                                   |
| <b>IP Class</b>      | IP40                                    |

## ENVIRONMENT

|                              |                           |
|------------------------------|---------------------------|
| <b>Operating temperature</b> | -40 to 85°C               |
| <b>Storage temperature</b>   | -40 to 85°C               |
| <b>Relative humidity</b>     | 5% to 95% (no condensing) |

## APPROVALS & STANDARDS TESTED FOR

|                      |                                                                                                                                                                                                                                                                                  |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>IEC 61000-4-2</b> | Electrostatic Discharge<br>Air discharge: $\pm 6\text{kV}$<br>Contact discharge: $\pm 8\text{kV}$                                                                                                                                                                                |
| <b>IEC 61000-4-4</b> | Electrical Fast Transient<br>Power supply: $\pm 0.4\text{kV}$<br>Data port: $\pm 0.2\text{kV}$                                                                                                                                                                                   |
| <b>IEC 61000-4-5</b> | Surge Immunity<br>Power supply: common mode $\pm 4\text{kV}$ , differential mode $\pm 2\text{kV}$ .<br>RS485/422: common mode $\pm 4\text{kV}$ , differential mode $\pm 2\text{kV}$ ;<br>Ethernet port: common mode $\pm 6\text{kV}$ , differential mode $\pm 2\text{kV}$<br>IEC |

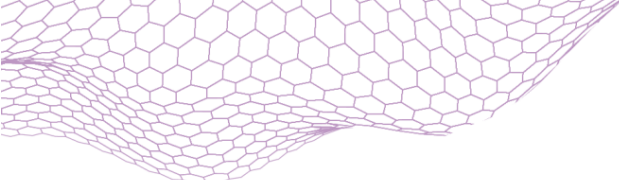

## ORDERING CODE

DDSE M D 24 ME

|             |                                             |
|-------------|---------------------------------------------|
| <b>DDSE</b> | 1* RS232/485/422 Serial to Ethernet Gateway |
| <b>M</b>    | Modbus Supported                            |
| <b>D 24</b> | Supply 24 VDC (Ranges 9 to 36V)             |
| <b>ME</b>   | Fixed                                       |

