


4 PORT LAYER 2+

INDUSTRIAL ETHERNET MANAGED SWITCH-GIGA

DDSMG CF SERIES



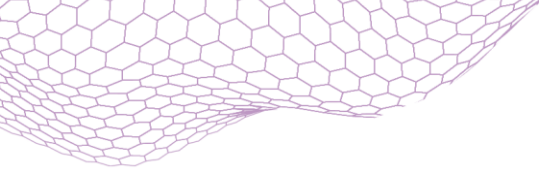

SYNOPSIS

- DDSMG 302-2S CF IS A FULL-GIGABIT, L2+ MANAGED INDUSTRIAL ETHERNET FIBER SWITCH.
- IT FEATURES 2 × 10/100/1000BASE-T RJ45 PORTS AND 2 × 100/1000BASE-X SFP UPLINK PORTS.
- THE DDSMG 302-2S CF SUPPORTS ADVANCED L2+ NETWORK MANAGEMENT, INCLUDING IPV4 STATIC ROUTING, COMPREHENSIVE SECURITY MECHANISMS, ACL/QOS POLICIES, AND RICH VLAN FEATURES.
- IT SUPPORTS MULTIPLE NETWORK REDUNDANCY PROTOCOLS SUCH AS STP/RSTP/MSTP (RECOVERY TIME < 50 MS) AND ERPS RING TOPOLOGY WITH CONVERGENCE TIME < 20 MS.
- NETWORK CONFIGURATION AND MANAGEMENT—INCLUDING ROUTING ADDRESS MANAGEMENT, PORT MANAGEMENT, FLOW CONTROL, VLANS, IGMP, AND SECURITY POLICIES—CAN BE PERFORMED VIA WEB UI, CLI, SNMP, AND TELNET.
- THE SWITCH IS HOUSED IN A RUGGED ALUMINUM ALLOY ENCLOSURE WITH AN IP40 PROTECTION RATING.
- IT FEATURES A DUAL REDUNDANT POWER INPUT, LOW POWER CONSUMPTION, AND FANLESS DESIGN.
- THE DEVICE IS IDEAL FOR INDUSTRIAL APPLICATIONS SUCH AS INTELLIGENT TRANSPORTATION SYSTEMS, RAIL TRANSIT, POWER UTILITIES, MINING, PETROLEUM, SHIPPING, ETC

FEATURES & BENEFITS

- SUPPORTS NON-BLOCKING, WIRE-SPEED PACKET FORWARDING FOR HIGH-PERFORMANCE DATA TRANSMISSION.
- SUPPORTS FULL-DUPLEX COMMUNICATION BASED ON IEEE 802.3X FLOW CONTROL AND HALF-DUPLEX OPERATION BASED ON BACKPRESSURE.
- SUPPORTS STP, RSTP, MSTP, AND ERPS PROTOCOLS TO ENSURE RAPID NETWORK RECOVERY AND HIGH AVAILABILITY.
- SUPPORTS BOTH STATIC AND DYNAMIC LINK AGGREGATION TO IMPROVE BANDWIDTH UTILIZATION AND LINK REDUNDANCY.
- COMPLIES WITH IEEE 802.1Q VLAN, SUPPORTING FLEXIBLE VLAN CONFIGURATIONS INCLUDING ACCESS, TRUNK, AND HYBRID MODES.
- ADVANCED QOS CAPABILITIES WITH PRIORITY CLASSIFICATION BASED ON 802.1P, PORT, AND DSCP, AND MULTIPLE QUEUE SCHEDULING ALGORITHMS INCLUDING EQU, SP, WRR, AND SP+WRR.
- SUPPORTS IGMP SNOOPING V1/V2/V3, MEETING THE REQUIREMENTS OF MULTI-TERMINAL HD VIDEO SURVEILLANCE AND VIDEO CONFERENCING APPLICATIONS.
- SUPPORTS ACL (ACCESS CONTROL LISTS) TO FILTER DATA PACKETS THROUGH CONFIGURABLE MATCHING RULES, OPERATION POLICIES, AND TIME-BASED PERMISSIONS, PROVIDING SECURE AND FLEXIBLE ACCESS CONTROL.
- SUPPORTS IEEE 802.1X AUTHENTICATION FOR ENHANCED NETWORK SECURITY.
- SUPPORTS PORT ISOLATION AND STORM CONTROL TO PROTECT THE NETWORK FROM BROADCAST STORMS AND UNAUTHORIZED TRAFFIC.
- SUPPORTS IP-MAC-VLAN-PORT BINDING TO STRENGTHEN ENDPOINT SECURITY.
- SUPPORTS SECURE MANAGEMENT ACCESS VIA HTTPS, SSLV3, AND SSH (V1/V2).
- SUPPORTS RMON, SYSTEM LOGS, LLDP, AND DETAILED PORT TRAFFIC STATISTICS FOR EFFICIENT NETWORK MONITORING AND MAINTENANCE.
- PROVIDES CPU AND MEMORY MONITORING, PING TESTING, AND CABLE DIAGNOSTICS FOR EFFECTIVE TROUBLESHOOTING.
- SUPPORTS MULTIPLE MANAGEMENT INTERFACES, INCLUDING WEB UI, CLI (CONSOLE AND TELNET), AND SNMP (V1/V2/V3).

TECHNICAL SPECIFICATIONS

INTERFACE

Fixed Port	2* 10/ 100/ 1000Base-T ports 2* 100/ 1000Base-X uplink SFP slot ports 1 * RS232 console port	
Ethernet Ports	Port 1-2 support 10/ 100/ 1000Base-T Autosensing, Full/Half duplex, Auto MDI/MDI-X	
Twisted Pair Transmission	10BASE-T : Cat3,4,5 UTP (≤100 meters) 100BASE-TX : Cat5 or later UTP (≤100 meters) 1000BASE-T : Cat5e or later UTP (≤100 meters)	
SFP Slot Port	Gigabit SFP optical Fiber interface	
Wavelength/Distance	Multimode: 850nm 0 to 550M, Single mode: 1310nm 0 to 40KM,	1310nm 0 to 2KM 1550nm 0 to 120KM

HARDWARE FEATURES

Network Management Type	L2+
Ring network	Supports ERPS ring network function, with a maximum number of rings of 5 and a convergence time of <20ms
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-X, IEEE802.3z 1000Base-X, IEEE802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	12Gbps
Buffer Memory	8.92Mpps
MAC	8K
LED Indicator	Power, Fiber
Reset Switch	Yes

SOFTWARE FEATURES

Port configuration	Auto-negotiation Flow Control Port Mirror: TX/RX/BOTH; Many-to-1 monitor. Traffic statistics
---------------------------	---

Link Aggregation

Static Link aggregation
LACP
Algorithm based on Source/Destination
MAC Algorithm based on Source/Destination IP

MAC Table

Aging Time
Static MAC address
Dynamic MAC address management

VLAN

4094 Active VLANs
4094 VID
802.1Q Tag VLAN
Port VLAN
Protocol VLAN
MAC VLAN
Voice VLAN
802.1ad Q-in-Q tunnelling Private
VLAN (Protected port) GARP/GVRP

ACL

256 ACLs
L2, L3 e L4
Time-based ACL

Spanning tree

802.1D Spanning Tree Protocol (STP)
802.1w Rapid Spanning Tree Protocol (RSTP)
802.1s Multiple Spanning Tree Protocol (MSTP)
Loop Guard
Root Guard
TC-BPDU Guard
BPDU Guard
BPDU Filter

Ring Protection

<20ms G.8032 ERPS Ring

Multicast

256 groups
IGMP v1/v2/v3 Snooping
Fast Leave
MLD Snooping
Multicast VLAN

QoS

Port-based
CoS 802.1p-based CoS
DSCP-based
Scheduling algorithms SP, WRR, SP+WRR
Storm Control (Broadcast, Multicast, Unknown Unicast)
Bandwidth control per port

DHCP

SNMP v1/v2c/v3 with Full Private MIBs RMON 4 groups
WEB (HTTP/HTTPS)
CLI (Telnet, Console, SSHv1/v2)
Firmware upgrade via console/web/TFTP Configuration
Backup/Reload
Dual Firmware
LLDP

Security Features

Port Security
MAC Address filter
ARP Association (Manual, ARP scanning, DHCP snooping)
ARP Protection
DoS (Denial of Service)
Classification of packages based on: End.MAC, IP End, TCP / UDP Ports, Protocol Type.
802.1x Authentication (port-based e MAC-based)
TACACS/TACACS+ Authentication
RADIUS Authentication
DHCP Filter
Guest VLAN
SSLv2/SSLv3/TLSv1
SSHv1/SSHv2
Restriction of WEB access based on: IP Address, And. MAC and Port.
Port Isolation
Loopback detection

Other Features

DNS Client DHCP
Relay DHCP Client
DHCP Snooping
DHCP Option 82
SNTP Client
UDLD

Maintenance

Cable Diagnostics
Ping
SFP DDM (Digital Diagnostics Monitoring)
Thermal Protection
System log (Local and Remote)
Memory and CPU Monitoring

L3 FUNCTIONS

Static Routing

IPV4 Equal Cost Routing
ND protocol, maximum 1000 entries
ARP protocol, maximum 1000 entries
Pingv6, Telnetv6, TFTPv6, DNSv6, ICMPv6
IPV4/IPV6 VRRP, the maximum group is 255
IPV4/IPV6 VLANIF interface supports up to 128
IPV4/IPV6 static route/default route supports up to 128 entries
L3 network management function,
IPV4/IPV6 Dual-stack management
Layer 3 routing and forwarding, support communication between different network segments and different VLANs

APPROVALS AND STANDARDS TESTED FOR

IEC61000-4-2	ESD: ±8kV contact discharge, ±15kV air discharge
IEC61000-4-3	RS:10V/m (80~ 1000MHz
IEC61000-4-4	EFT: power cable: ±4kV; data cable: ±2kV
IEC61000-4-5	Surge: power cable:CM±4kV/DM±2kV; data cable: ±4kV
IEC61000-4-6	Radio frequency transmission:10V(150kHz~80MHz)
IEC61000-4-8	Power frequency magnetic field:100A/m;1000A/m, 1s to 3s
IEC61000-4-9	Pulsed magnet field:1000A/m
IEC61000-4- 10	Damped oscillation:30A/m 1MHz
IEC61000-4- 12/ 18	Shockwave: CM 2.5kV, DM 1kV
IEC61000-4- 16	Common-mode transmission:30V; 300V, 1s
IEC61000-6-2	Common Industrial Standard
IEC60068-2-6	Anti vibration
IEC60068-2-27	Anti shock
IEC60068-2-32	Free fall
Lightning Protection	Lightning protection: 6KV 8/20us,

POWER

Power Supply	12-57VDC Dual Redundant Power Supply
---------------------	---

PHYSICAL CHARACTERISTICS

Dimension (L*W*H)	172mm* 145mm*55mm
Installation	Desktop, DIN rail
IP rating	IP40
Enclosure	Aluminium Alloy

ENVIRONMENT

Working Temperature	-40°C to +75°C
Storage Temperature	-40°C to +85°C
Operating Humidity	5% to 90% (no condensation)
Storage Humidity	5% to 95% (no condensation)

ORDERING CODE

DDSMG 302-2S CF

DDSMG	Industrial Grade L2+ Giga Managed Ethernet Switch
302	2 * 10/100/1000 T ports
2S	2 * 100/1000Base-X uplink SFP slot ports
CF	Fixed