


RS485/422 SURGE PROTECTOR

DDSP SERIES

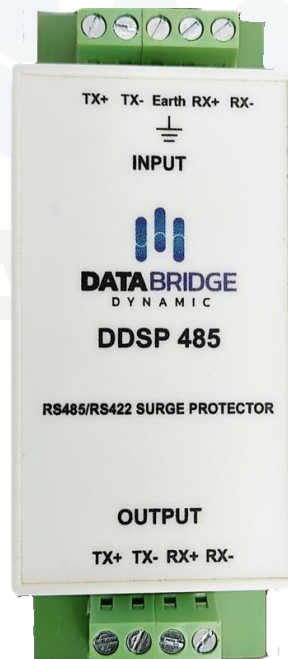

SYNOPSIS

- ELECTRONIC EQUIPMENT IS SUSCEPTIBLE TO TRANSIENT DISTURBANCES FROM A VARIETY OF SOURCES INCLUDING ESD TO AN OPEN CONNECTOR OR INTERFACE, DIRECT OR NEARBY LIGHTNING STRIKES TO CABLES AND WIRES, AND CHARGED CABLES "HOT PLUGGED" INTO I/O PORTS.
- DDSP 485 IS DESIGNED TO PROTECT SERIAL PORT FROM DAMAGE WHICH MAY RESULT FROM SUCH TRANSIENT EVENTS.
- THE PROTECTION INCLUDES CURRENT LIMITATION, VOLTAGE CLAMPING, GROUNDING THE LIGHTENING AND SURGE ARRESTING USING A MIX OF VARIOUS PROTECTION DEVICES TO OBTAIN A WELL-BALANCED SURGE PROTECTOR
- THIS A GOOD ALTERNATIVE FOR LONG CABLE RUNS THROUGH NOISY AREAS OR DURING LIGHTENING & NOISY TRANSIENTS.

TECHNICAL SPECIFICATIONS

INPUT/OUTPUT


Input / Output	RS422/RS485
Input /Output Connector	Screw type Terminal Block

PROTECTION

Transient Voltage Suppression	600W
Stand Off Voltage	12.8V
Max Breakdown Voltage	15.8V
Max Clamping Voltage	21.2V
Lightening & Surge Protection	4KV
DC Spark Over Voltage	72 to 102V Dc
Impulse Spark Over Voltage	<450V at 100V / μ sec < 800V at 1 KV / μ sec
Nominal impulse discharge current (wave 8/20 μs) 5)	10KA
Single impulse discharge current (wave 8/20 μs) 5)	15KA

MECHANICAL

Dimension	110mm (H) x 43mm (W)x34mm(D)
Enclosure	Plastic
Mounting	DIN Rail

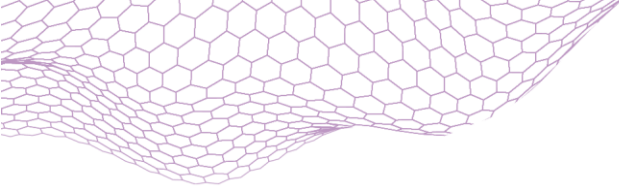

OPERATING CONDITIONS

Operating Temperature

Normal: 55°C
Max :65°C

Note : No Power Supply Needed

ORDERING CODE

DDSP 485

DDSP 485

Databridge Dynamic RS422/485 Surge Protector



DATA BRIDGE
D Y N A M I C